

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number
WO 01/98819 A2

- (51) International Patent Classification⁷: **G02B 617/**
- (21) International Application Number: **PCT/US01/14329**
- (22) International Filing Date: **3 May 2001 (03.05.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/596,916 20 June 2000 (20.06.2000) **US**
- (71) Applicant: **CORNING INCORPORATED [US/US]; 1 Riverfront Plaza, Corning, NY 14831 (US).**
- (72) Inventors: **FAJARDO, James, C.; 170 Wygant Road, Apt. 11, Horseheads, NY 14845 (US). SRIKANT, V.; 107 E. State St., #301, Ithaca, NY 14850 (US). WEST, James, A.; 1 East Chatfield Place, Painted Post, NY 14870 (US).**
- (74) Agent: **REDMAN, Mary, Y.; Corning Incorporated, SP TI 3 1, Corning, NY 14831 (US).**
- (81) Designated States (*national*): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (*regional*): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**
- Published:**
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **DISPERSION COMPENSATING PHOTONIC CRYSTAL FIBER**

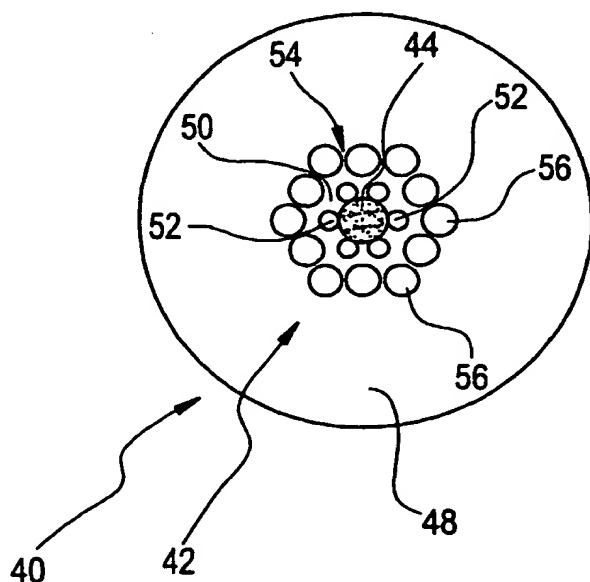

(57) Abstract: A fiber optic waveguide is disclosed. The fiber optic waveguide includes a core region, and a moat region surrounding the core region. A cladding region surrounds the moat region and the core region. The cladding region includes a lattice of column structures disposed within a solid background matrix. A diameter of the core region is sized for making contact with the moat region for creating an extended core region at longer wavelengths. The core region, the moat region, and the cladding region function to produce unique dispersion compensating properties, which include negative dispersion and positive dispersion. The core region may be formed from a high index material and the moat region may be formed from a material having a refractive index lower than the refractive index of the core region. The cladding region is formed from a material having a refractive index which is higher than the index of the moat region and lower than the refractive index of core region.

FP00-0123 -00EP-SE
04.1.22
SEARCH REPORT

WO 01/98819 A2

DISPERSION COMPENSATING PHOTONIC CRYSTAL FIBER

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

The present invention relates generally to a photonic crystal optical waveguide structure for an optical communication system. More particularly, the present invention is directed to an optical fiber micro-structure having photonic crystal characteristics for producing dispersion compensating properties.

10 2. Technical Background

Optical waveguide fibers can be generally classified into single-mode fiber and multimode fiber. Both types of optical fiber rely on total internal reflection (TIR) for guiding the photons along the fiber core. Typically, the core diameter of single-mode fiber is relatively small, thus allowing only a single mode of light wavelengths to
15 propagate along the waveguide. Single-mode fiber can generally provide higher bandwidth because the light pulses can be spaced closer together, and are less affected by dispersion along the fiber. Additionally, the rate of power attenuation for

the propagating light is lower in a single-mode fiber. Optical fibers which maintain their single mode characteristics for all wavelengths are defined as *endlessly single mode* fibers.

Optical fibers having a larger core diameter are generally classified as multimode fibers, and allow multiple modes of light wavelengths to propagate along the waveguide. The multiple modes travel at different velocities. This difference in group velocities of the modes results in different travel times, causing a broadening of the light pulses propagating along the waveguide. This effect is referred to as modal dispersion, and limits the speed at which the pulses can be transmitted; in turn limiting the bandwidth of multimode fiber. Graded-index multimode fiber (as opposed to step-index multimode fiber) has been developed to limit the effects of modal dispersion. However, current multimode and graded-index multimode fiber designs still do not have the bandwidth capabilities of single-mode fiber.

Photonic crystals are another means by which photons (light modes) can be guided through an optical waveguide structure. Rather than guiding photons using TIR, photonic crystals rely on Bragg scattering for guiding the light. The characteristic defining a photonic crystal structure is the periodicity of dielectric material along one or more axes. Thus, photonic crystals can be one-dimensional, two-dimensional and three-dimensional. These crystals are designed to have photonic band gaps which prevent light from propagating in certain directions within the crystal structure. Generally, photonic crystals are formed from a periodic lattice of dielectric material. When the dielectric constants of the materials forming the lattice are different, and the material absorbs minimal light, the effects of scattering and Bragg diffraction at the lattice interfaces allow the photons to be guided along or through the photonic crystal structure.

position within the optical fiber. More specifically, the index profile shows that the optical fiber has a high index core region 24 which is surrounded by a low index cladding region 26. The graph of Figure 3A is generally representative of the index profile of PCF 16 shown in Figure 2. Figure 3A is provided primarily for comparison with the index profiles of Figures 3B and 3C. Figure 3B shows the index profile of an exemplary dispersion compensating optical fiber. The index profile graph shows a fiber having a high index core region 28 surrounded by a low index moat region 30. The low index moat region 30 is then surrounded by an intermediate index cladding region 32. Figure 3C shows the index profile for another exemplary dispersion compensating fiber which is similar to that of Figure 3B. The fiber of Figure 3C also includes a high index core region 28, a low index moat region 30, and an intermediate index cladding region 32 surrounding the moat region 30. The fiber of Figure 3C includes an additional higher index feature 34 surrounding the moat region 30 for shifting the cutoff wavelength of the optical fiber. In order to obtain large negative dispersion, the core region of the optical fiber must typically be small and the index contrast between the core region and the cladding region must be high.

Throughout the world, optical communication system operators are moving toward 10 Gb/s transmission speeds to meet an ever-growing demand for network capacity. As part of this transition, millions of miles of existing standard single-mode optical fiber must be upgraded from optimization for operation at 1310 nm to optimization for operation in the 1550 nm window. As optical systems and networks are upgraded to higher transmission speeds, chromatic dispersion is often the factor limiting performance. The dispersion wavelength characteristic of the single-mode optical fiber is such that dispersion is effectively zero at a wavelength of 1310 nm and increases as the wavelength increases or decreases from 1310 nm. At a wavelength

6

of 1550 nm, a large positive dispersion may be created. Therefore, when light with a wavelength of 1550 nm is transmitted over existing communication links constructed of single-mode optical fibers designed to transmit at wavelengths of 1310 nm, the waveform becomes distorted from the effects of chromatic dispersion.

5 Chromatic dispersion is caused by a variation in the group velocity of light travelling within an optical fiber as the optical frequency changes. A data pulse always contains a spectrum of wavelengths. As the pulse travels along the fiber, the shorter wavelength components travel faster than the longer wavelength components. This effect broadens the pulse and causes it to interfere with adjacent pulses and distort the
10 transmission signal.

 Although fiber designs with very low dispersion are available, systems utilizing such fibers are typically limited by non-linear effects such as four-wave mixing. In order to combat dispersive effects in existing deployments, the preferred solution is to install dispersion compensating modules which cancel the dispersive effects on a
15 span-by-span basis. These modules require very high dispersion (usually negative as opposed to positive), relatively low loss, and more recently broadband performance, also referred to as dispersion slope compensation. It has been suggested that photonic crystal fibers be developed for use in dispersion compensation.

 One technique for combating the effects of chromatic dispersion is to
20 install a dispersion compensating module such as the PureGain™ DCM® Module from Corning Incorporated, at a point along the fiber optic link. Such a dispersion compensation module utilizes a dispersion compensating fiber. One example is that disclosed in U.S. Patent No. 5,361,319, also assigned to Corning Incorporated, the assignee of the present invention. The dispersion compensating fiber introduces high
25 levels of dispersion over a relatively short length, which offsets or cancels the

7

dispersion accumulated by a pulse travelling through optically amplified systems on standard single-mode fiber.

An advantage realized through photonic crystal fiber (PCF) structures is that the large contrast between core and clad effective index afforded by these structures can produce unique dispersion characteristics. In view of the advantages associated with PCF structures, it is desirable to provide an optical waveguide PCF which produces relatively high negative or positive signal dispersion characteristics. It is further desirable to provide an optical fiber having a PCF structure which can be used as a component in dispersion compensating modules for optical fiber communication networks.

SUMMARY OF THE INVENTION

In accordance with the teachings of the present invention, a fiber optic waveguide is disclosed. The fiber optic waveguide includes a core region, and a moat region surrounding the core region. A cladding region surrounds the moat region and the core region. The cladding region includes a lattice of column structures disposed within a solid background matrix. A diameter of the fiber core region is sized for making contact with the moat region for creating an extended core region at longer wavelengths when compared to the diameter of the fiber core region. The core region, the moat region, and the cladding region function to produce unique dispersion compensating properties, which include negative dispersion and positive dispersion. The core region may be formed from a high index material and the moat region may be formed from a material having a refractive index lower than the refractive index of the core region. The cladding region is formed from a material having a refractive index

8

which is higher than the index of the moat region and lower than the refractive index of core region.

It is to be understood that both the foregoing general description and the following detailed description are merely exemplary of the invention, and are intended to provide an overview or framework for understanding the nature and character of the invention as it is claimed. The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate various features and embodiments of the invention, and together with the description serve to explain the principles and operation of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The various advantages of the present invention will become apparent to one skilled in the art by reading the following specification and appended claims, and by referencing the following drawings in which:

Figure 1 is a perspective view of an exemplary two-dimensional photonic crystal structure;

Figure 2 is a cross-sectional view of a photonic crystal fiber known within the prior art;

Figures 3A-3C are graphs showing the index profiles of various optical fibers;

Figure 4 is a cross-sectional view of a dispersion compensating fiber having a photonic crystal type structure in accordance with a preferred embodiment of the present invention;

Figure 5 is a cross-sectional view of a dispersion compensating fiber having a

9

photonic crystal type structure in accordance with an alternate preferred embodiment of the present invention;

Figure 6 is a graph showing the index profile of the dispersion compensating fibers of Figures 4 and 5; and

5 Figure 7 is a graph showing the dispersion characteristics of the optical fiber structures of Figures 4 and 5.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the present preferred embodiments of
10 the invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numerals will be used throughout the drawings to refer to the same or like parts.

Referring now to Figure 4, a cross-sectional view of a dispersion compensating fiber 40 is shown in accordance with a preferred embodiment of the present invention.
15 The fiber 40 includes a low index cladding region 42 formed around a high index fiber core or fiber core region 44. The cladding region 42 includes a solid background matrix 48.

The core region 44, preferably formed from high index glass, is surrounded by a low index moat region 50 formed by a ring of air columns 52. As shown, the moat
20 region 50 is disposed directly around the core region 44, and between the core region 44 and the cladding region 42. While a ring of six air columns 52 is preferred, one skilled in the art will appreciate that the ring may include any number of air columns ranging from three (3) air columns up to twelve (12) air columns. Additionally, the moat region 50 may be formed from a solid material having a low index of refraction. A
25 particular feature of the moat region 50 is that the air columns 52 contact the outer

circumference of the column structure forming the core region 44.

Also shown in Figure 4 is that a periodic lattice of columns 56 surrounds the moat region 50. Preferably the lattice of columns 56 are formed from a solid material including but not limited to glass. Figure 5 shows an alternate preferred embodiment of the dispersion compensating fiber 40 of Figure 4. More specifically, fiber 40' includes a solid ring 58 which replaces the periodic lattice of columns 56. Preferably, the lattice of columns 56 and the solid ring 58 are formed from a material having an index of refraction between that of the fiber core 44 and the background matrix 48.

With reference to Figures 4 and 5, the purpose for including the moat region 50 is to effectively produce a low index extended core region 54 at longer wavelengths when compared to the diameter of the fiber core region 44. For example if the core region 44 has a diameter of 2 micrometers, longer wavelengths would be those wavelengths which exceed 2 micrometers. The low index extended core region 54 therefore includes the core region 44 and the moat region 50 at longer wavelengths. This prevents the cladding region 42 and especially the lattice of columns 56 or the solid ring 58 of the dispersion compensating fiber structure from acting as a waveguide. When the wavelength becomes short enough to resolve the structure in the extended core region 54, the optical fiber 40 begins to guide and the turn-on of the fundamental mode shows a highly dispersive feature, and preferably a highly negative dispersive feature.

The background matrix 48 which surrounds the core region 44 is chosen such that the effective cladding index is between the index of the core region 44 and the index of the moat region 50. This is sometimes referred to as an intermediate-index cladding region. While it is preferred that the background matrix 48 and cladding region 42 are formed from a solid pure silica material, other solid material such as

fluorine doped silica or germanium doped silica can be used. While not specifically shown, an absorptive polymer coating is typically applied to the outer surface of the cladding region 42 and optical fiber 40.

A particular feature of dispersion compensating fiber 40 is that the core region
5 44 is substantially larger in diameter than the column structures forming the moat region 50. The fiber core region 44 is preferably formed from doped silica for altering the index characteristics and raising the index to as high as about $n = 1.48$. However, the core region 44 may also be formed from solid silica, which has an index (n) of about $n = 1.45$. Thus, dispersion compensating fiber 40 has a structure which is
10 similar to a photonic crystal fiber, but primarily relies upon effective index properties for achieving its unique dispersion characteristics.

Figure 6 shows the preferred index profile for dispersion compensating fiber 40. More particularly, the index profile for the high index core region 44 is shown at 60. The index profile for the air columns 52 forming the moat region 50 are shown at 62,
15 and as will be appreciated define a refractive index value that approaches $n = 1.0$, the refractive index for air. The index profile for the solid background matrix 48 is shown at 64. The index profile for either the periodic lattice of columns 56 or the solid ring 58 surrounding the moat region 50 is shown at 66.

The amount of dispersion is controlled by the ratios between the three indices
20 (core, moat and cladding), by the ratio of the core region 44 and moat 50 diameters, and by the profile of the core region. The exact design of the fiber will be dependent on the intended application by a typical dispersion curve as shown in Figure 7. As will be appreciated, larger air columns 52 in the moat region 50 increase the dispersion, but also greatly increase the dispersion slope, as shown in Figure 7, making slope
25 compensation more difficult.

12

The foregoing discussion discloses and describes exemplary embodiments of the present invention. One skilled in the art will readily recognize from such discussion, and from the accompanying drawings and claims, that various changes, modifications and variations can be made therein without departing from the spirit and

5 scope of the invention as defined in the following claims.

13
CLAIMS

What is Claimed is:

1. A fiber optic waveguide comprising:
a core region;
5 a moat region surrounding the core region;
a cladding region surrounding the moat region and the core region, the
cladding region including a lattice of column structures disposed within a solid
background matrix;
wherein a diameter of the core region is sized for making contact with
10 the moat region.
2. The waveguide of Claim 1 wherein the core region is formed from high
index glass.
- 15 3. The waveguide of Claim 1 wherein the moat region is formed from a
material having a low index of refraction.
4. The waveguide of Claim 1 wherein the moat region is formed from a
ring of low index columns formed from a solid material.
20
5. The waveguide of Claim 1 wherein the moat region is formed from a
ring of air columns which surround the core region.
6. The waveguide of Claim 5 wherein the ring of air columns includes six
25 air columns.

7. The waveguide of Claim 1 wherein the cladding region is formed from a material having an index which is higher than the index of the moat region and lower
5 than the index of the core region.

8. The waveguide of Claim 1 wherein each column within the lattice of columns is formed from a solid material.

10 9. The waveguide of Claim 8 wherein the columns of solid material are glass.

10. The waveguide of Claim 8 wherein the columns of solid material are a low index material.

15

11. The waveguide of Claim 1 wherein the resulting fiber optic waveguide produces dispersion altering characteristics.

12. The waveguide of Claim 1 wherein the core region functions as a defect
20 in the lattice of columns for guiding light within the fiber optic waveguide.

13. The waveguide of Claim 8 wherein said lattice of column structures comprises a ring of column structures surrounding said moat region,
25 and said material has an index of refraction higher than that of said

15

cladding region.

14. A fiber optic waveguide for altering the dispersion characteristics of a signal transmitted along the waveguide comprising:

5

a high index core region;

a low index moat region surrounding the core region;

a cladding region surrounding the moat region and the core region, the cladding region including a lattice of solid material columns disposed within a solid background matrix, the cladding region being formed from a material having an index which is higher than the index of the moat region and lower than the index of the core region;

10

wherein a diameter of the core region is sized for making contact with the moat region for creating an extended core region at long wavelengths, and wherein the resulting fiber optic waveguide produces dispersion altering characteristics.

15

15. The waveguide of Claim 14 wherein the moat region is formed from a ring of air columns which surround the core region.

16. The waveguide of Claim 15 wherein the ring of air columns includes at least six air columns.

20

17. A fiber optic waveguide for altering the dispersion characteristics of a signal transmitted along the waveguide comprising:

a high index core region;

a low index moat region surrounding the core region, the moat region

25

including a ring of at least six air columns surrounding the core region;

16

a cladding region surrounding the moat region and the core region, the cladding region including a lattice of solid material columns disposed within a solid background matrix, the cladding region being formed from a material having an index which is higher than the index of the moat region and lower than the index of the core region;

wherein a diameter of the core region is sized for making contact with the moat region for creating an extended core region at long wavelengths, and wherein the resulting fiber optic waveguide disperses the signal transmitted along the waveguide.

10

18. A fiber optic waveguide comprising:

a core region;

a moat region surrounding the core region;

a cladding region surrounding the moat region and the core region, the

15 cladding region including a ring of a solid material surrounding said moat region and disposed within a solid background matrix;



wherein a diameter of the core region is sized for making contact with the moat region.

20 19. The waveguide of Claim 18 wherein the moat region is formed from a ring of low index columns formed from a solid material.

20. The waveguide of Claim 19 wherein the moat region is formed from a ring of air columns which surround the core region.

25

1/4

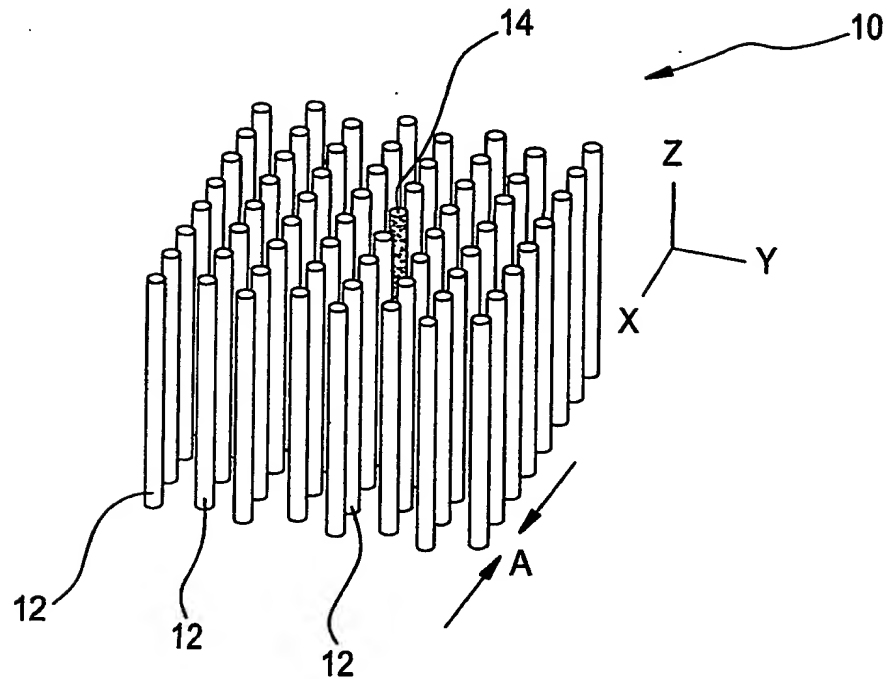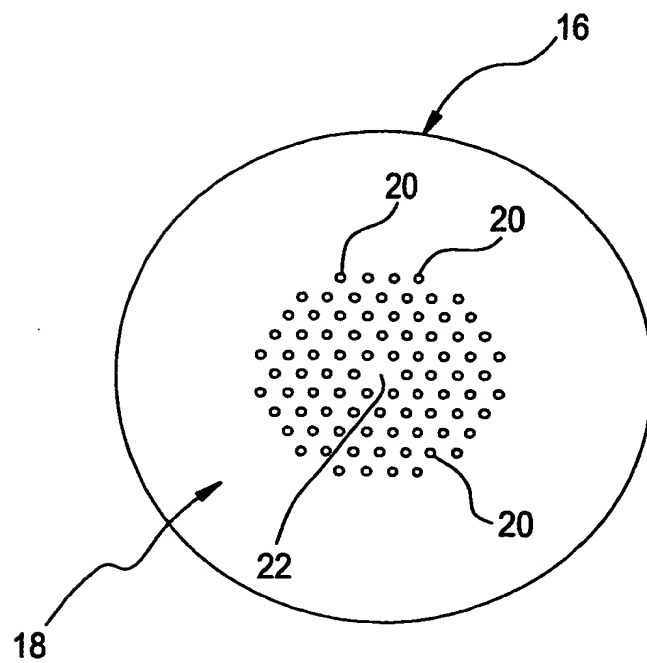FIG. 1
PRIOR ART**FIG. 2**
PRIOR ART

2/4

FIG. 3A

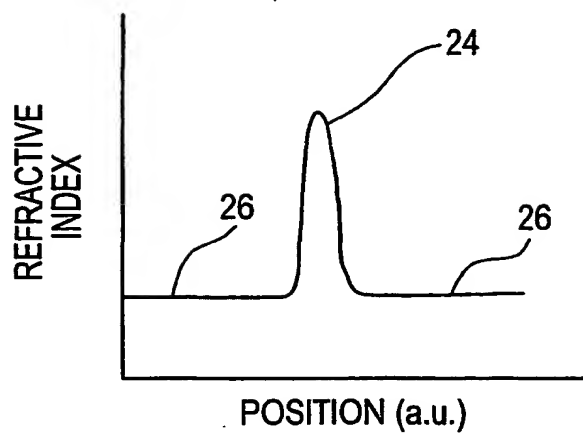


FIG. 3B

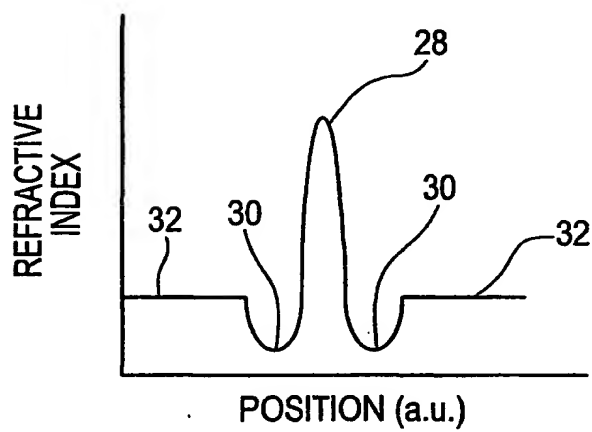


FIG. 3C

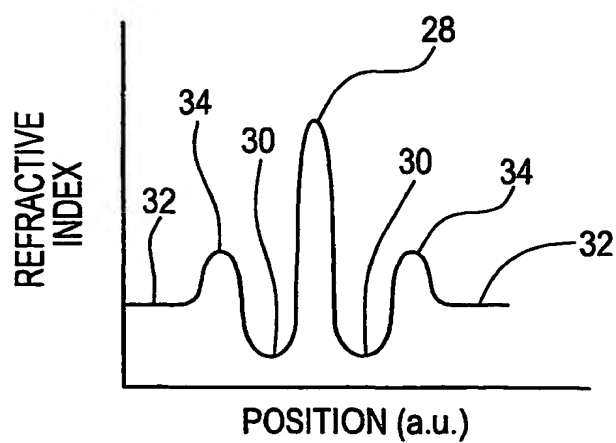


FIG. 4

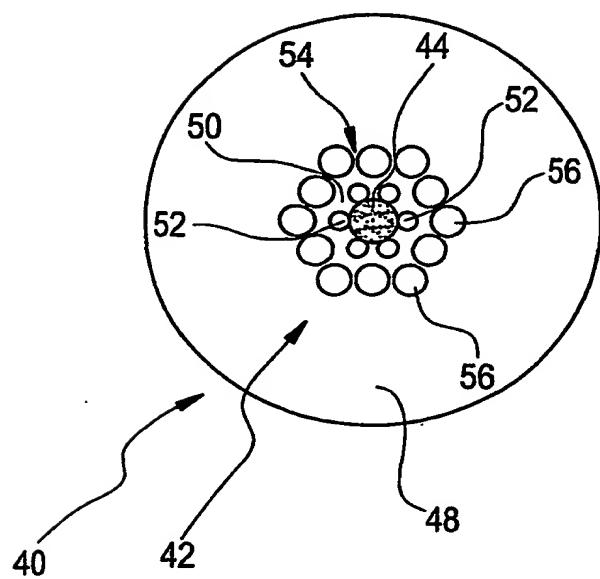


FIG. 5

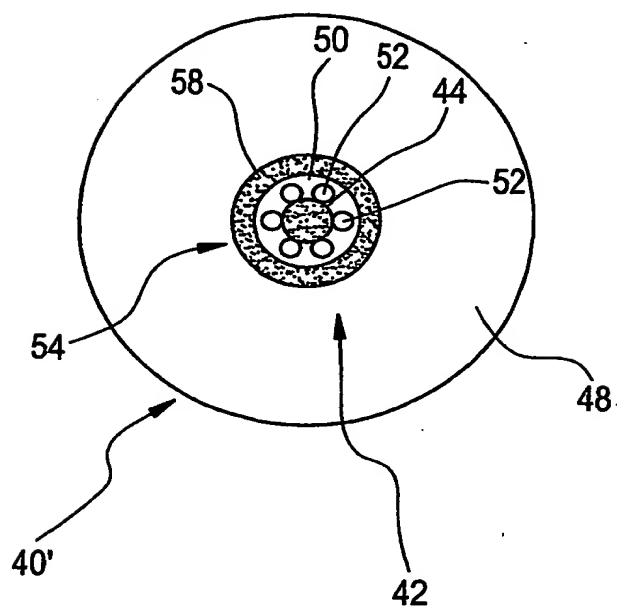


FIG. 6


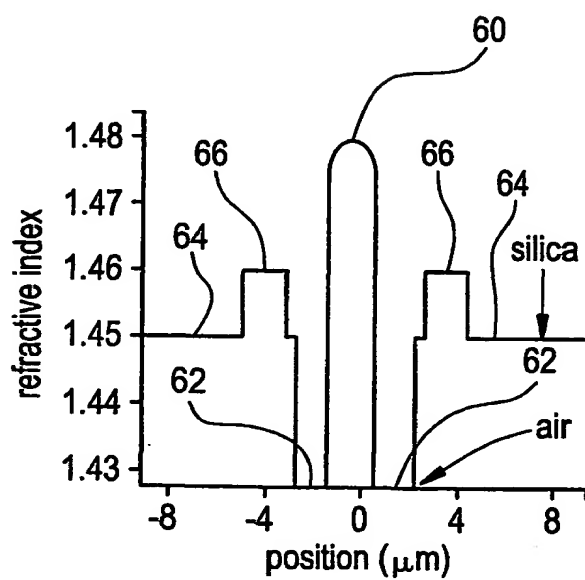


FIG. 7



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

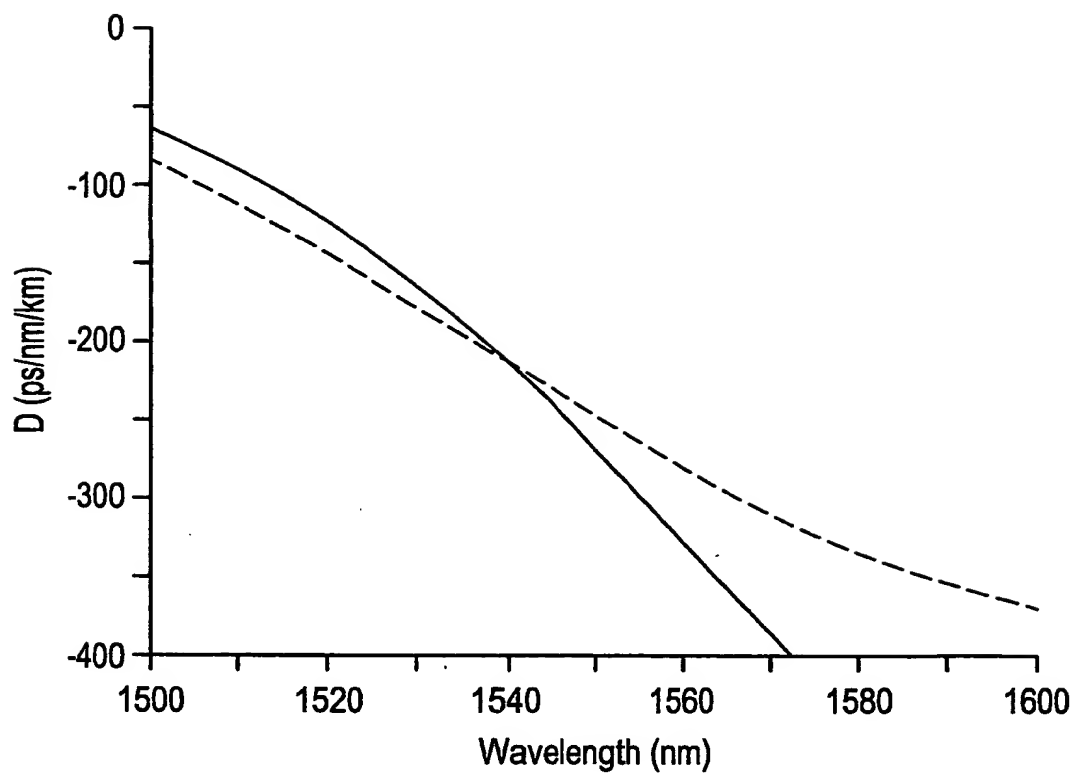

(43) International Publication Date
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number
WO 01/98819 A3

(51) International Patent Classification⁷: G02B 6/16

(21) International Application Number: PCT/US01/14329

(22) International Filing Date: 3 May 2001 (03.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/596,916 20 June 2000 (20.06.2000) US

(71) Applicant: CORNING INCORPORATED [US/US]; 1
Riverfront Plaza, Corning, NY 14831 (US).

(72) Inventors: FAJARDO, James, C.; 170 Wygant Road,
Apt. 11, Horseheads, NY 14845 (US). SRIKANT, V.; 107
E. State St., #301, Ithaca, NY 14850 (US). WEST, James,
A.; 1 East Chatfield Place, Painted Post, NY 14870 (US).

(74) Agent: REDMAN, Mary, Y.; Corning Incorporated, SP
TI 3 1, Corning, NY 14831 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE, TR).


Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(88) Date of publication of the international search report:
10 May 2002

*For two-letter codes and other abbreviations, refer to the "Guide-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: DISPERSION COMPENSATING PHOTONIC CRYSTAL FIBER

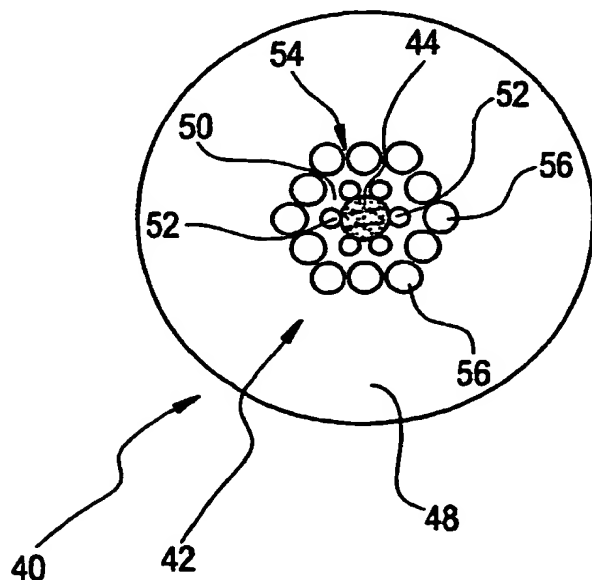

(57) Abstract: A fiber optic waveguide is disclosed. The fiber optic waveguide includes a core region (44), and a moat region (50) surrounding the core region (44). A cladding region (42) surrounds the moat region (50) and the core region (44). The cladding region (42) includes a lattice (56) of column structures disposed within a solid background matrix (48). The diameter of the core region (44) is sized for making contact with the moat region (50) for creating an extended core region (54) at longer wavelengths. The core region (44), the moat region (50), and the cladding region (42) function to produce unique dispersion compensating properties, which include negative dispersion and positive dispersion. The core region (44) may be formed from a high index material and the moat region (50) may be formed from a material having a refractive index lower than the refractive index of the core region (44). The cladding region (42) is formed from a material having a refractive index which is higher than the index of the moat region (50) and lower than the refractive index of core region (44).

WO 01/98819 A3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/14329

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B6/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, INSPEC, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 802 236 A (DIGIOVANNI DAVID JOHN ET AL) 1 September 1998 (1998-09-01) abstract; figures 5,6 column 4, line 55 -column 6, line 16 column 7, line 24-40 column 7, line 55 -column 8, line 67 column 10, line 2-12; figure 4	1-20
E	EP 1 118 887 A (SUMITOMO ELECTRIC INDUSTRIES) 25 July 2001 (2001-07-25) paragraphs '0050!-'0053! paragraphs '0061!,'0062! paragraphs '0098!,'0100!,'0101!; figures 2,4,6 --- -/--	1,5-7, 11,12

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

1 March 2002

Date of mailing of the international search report

11/03/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Riblet, P

INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/US 01/14329

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>BIRKS T A ET AL: "DISPERSION COMPENSATION USING SINGLE-MATERIAL FIBERS" IEEE PHOTONICS TECHNOLOGY LETTERS, IEEE INC. NEW YORK, US, vol. 11, no. 6, June 1999 (1999-06), pages 674-676, XP000835430 ISSN: 1041-1135 the whole document</p>	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/14329

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5802236	A	01-09-1998	DE	69707201 D1	15-11-2001
			EP	0810453 A1	03-12-1997
			JP	10095628 A	14-04-1998
EP 1118887	A	25-07-2001	EP	1118887 A2	25-07-2001
			US	2001055455 A1	27-12-2001